




TEHNIČKE KARAKTERISTIKE

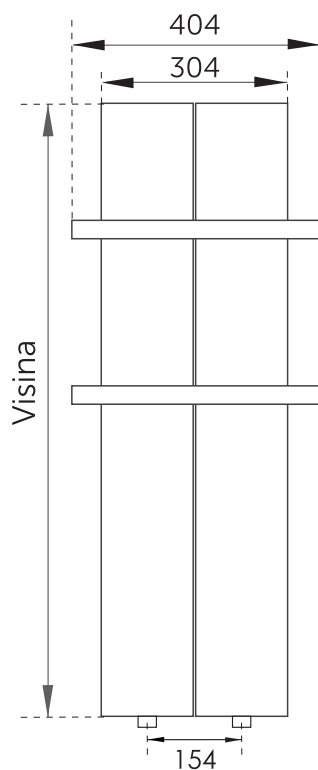

Tip FN-2

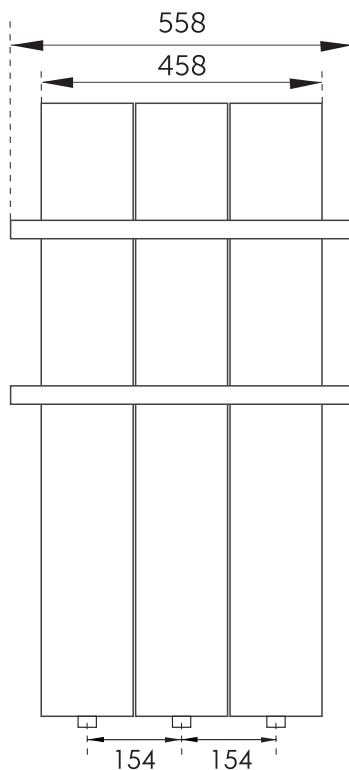

Tip FN-3

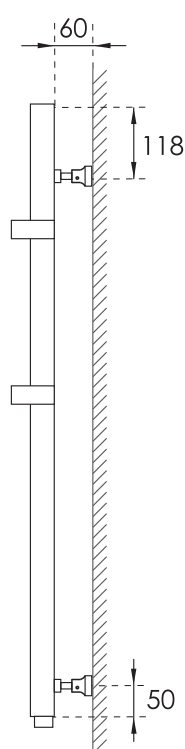

Tip		2/80	2/100	2/120	2/150	3/80	3/100	3/120	3/150
Δt	5	8	12	16	20	12	18	25	32
	10	24	34	44	55	36	51	67	87
	15	45	62	79	98	68	93	121	154
	20	71	96	121	147	107	144	183	232
	25	101	134	167	202	152	201	253	318
	30	134	176	218	261	202	265	330	412
	35	171	222	273	325	258	334	412	512
	40	211	272	332	393	318	408	500	619
	45	254	324	394	465	382	487	593	732
	50	300	380	460	540	451	570	691	850
	55	349	439	529	619	523	658	793	973
	60	400	500	600	700	600	750	900	1101
	65	454	564	674	784	680	846	1011	1233
	70	510	630	751	871	764	945	1125	1369
	75	569	699	831	961	851	1049	1243	1510
	80	630	771	913	1054	942	1155	1365	1655
Km		0,6257	1,053	1,532	2,08135	0,9784	1,5999	2,3999	3,31
n		1,5779	1,5052	1,4582	1,421	1,5677	1,5021	1,4476	1,4182
Visina (mm)		800	1000	1200	1500	800	1000	1200	1500
Širina (mm)		404	404	404	404	558	558	558	558
Zapremina vode (l)		0,43	0,51	0,59	0,72	0,59	0,72	0,84	1,02
Masa (kg)		4,0	5,0	6,0	7,5	6,0	7,5	9,0	10,8

RADNI USLOVI
pH vrednost: 6-11
Ispitni pritisak: 9 bar